


SMD
application

Tip Style	A	B	F	D	E	BD	H	T	BT75	L
Material	B	B-S	B	B	B-S	B	B	B	S	B-S
∅ mm	0,53 0,89	0,53	0,89	0,53 0,89	0,89	0,53	0,89	0,89	0,53	0,53 0,89

Receptacle

TKR-0

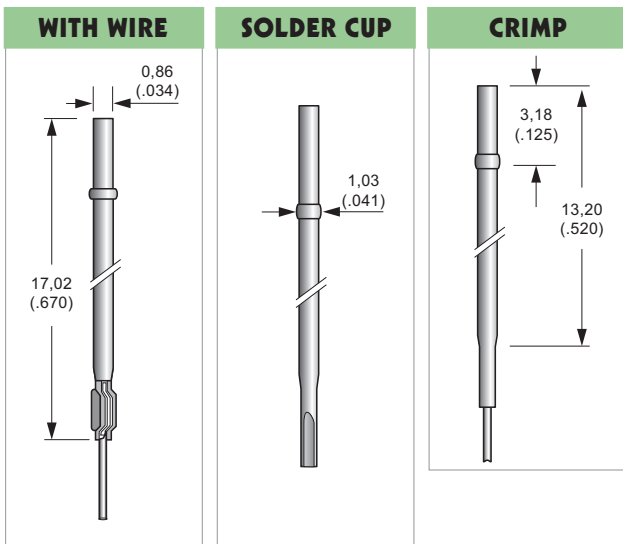


How to Order:

TKR-0

W

C = Crimp
S = Solder cup
W = Wire wrap
WW = With Wire



FR4 suggested drill diameter

Technical Data

Recommended Minimum Centers : 1,27 mm (.050)
Current Rating : 1,0 A
Typical Contact Resistance : 30 m Ω
Recommended Working Travel : 1,78 mm (.070)

Materials

Barrel : Brass, gold plated
Spring : Music Wire, silver / gold plated
Plunger : Becu, hardened 24 Kt. gold plated

Max Travel : 2,54 mm (.100)

Spring Force : 100 gr.

Preload : 32 gr.

How to Order:

Serie	Material	Plunger	∅	Spring Force	Galvanic
TK-0	B=Becu S=Steel SS=Stainless St.				G = gold N = nickel R = rodium