

Tip Style	D	E	T	T	A33
Material	B	B	B	B	B
Ø mm	1,02 1,96	2,00	1,57 1,96 2,49	3,30 3,96	1,96

### Technical Data

Recommended Minimum Centers : 2,54 mm (.100)  
 Current Rating : 3,0 A  
 Typical Contact Resistance : 50 m Ω  
 Recommended Working Travel : 1,27 mm (.050)

### Materials

Barrel : Brass, gold plated  
 Spring : Music Wire, silver / gold plated  
 Plunger : Becu, hardened 24 Kt. gold plated




**Max Travel :** 1,52 mm (.060)

**Spring Force :** 100 gr.

**Preload :** 37 gr.

### Receptacle

### TKR-100

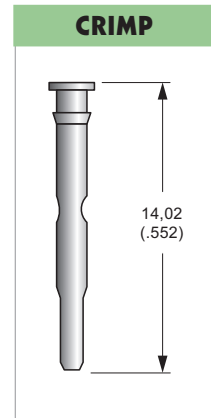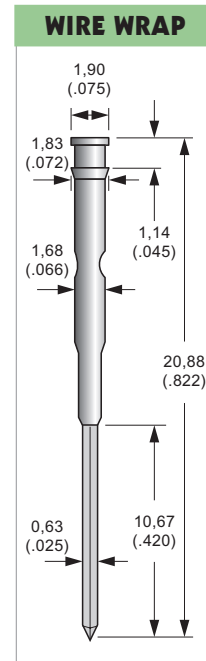

### How to Order:

**TKR-100**

C = Crimp

W = Wire wrap

### How to Order:

Serie	Material	Plunger	Ø	Spring Force	Galvanic
TK-100	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

B=Becu  
 S=Steel  
 SS=Stainless St.

G = gold  
 N = nickel  
 R = rodium