TK-103W / TK-103

HIGH CURRENT PROBE

160 / 180 Mils

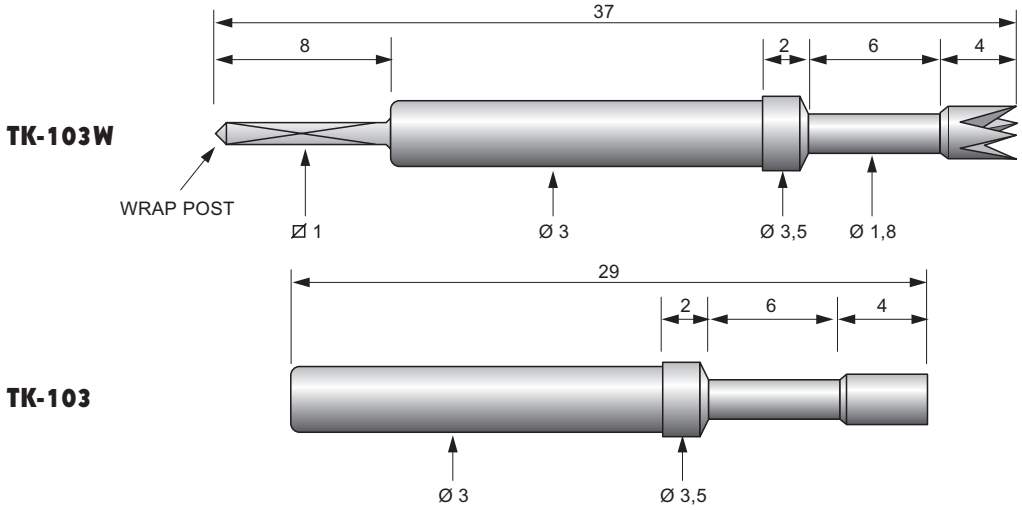

Tip Style	A	B	F	D	H	L
						
Material	**B**	**B-S**	**B**	**B**	**B**	**B-S**
Ø mm	2,30	1,80	2,30	2,30	2,30	2,30

Technical Data

Recommended Minimum Centers : 4,0 mm
Current Rating : 3,0 - 5,0 A
Tipical Contact Resistance : 24 m Ω

Materials

Barrel : Brass, gold plated
Spring : Music Wire, steel / gold plated
Plunger : Becu, gold plated

Max Travel : 6 mm.

Spring Force : 150 gr.

Spring options : 80 g. / 300 g. / 500 g.

Receptacle TKR-103

TK-103 23

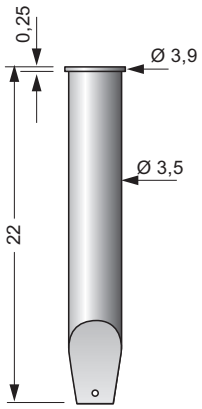

TK-103 30

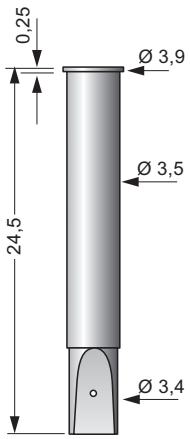

COLLAR HEIGHT

TKC-103 02



TKC-103 03



TKC-103 05



How to Order:

Serie	Material	Plunger	Ø	Spring Force	Galvanic
	B=Becu S=Steel SS=Stainless St.				G = gold N = nickel R = rodium
TK-103					

How to Order:

TKR-103	23 or 30
TKC-103	2, 3 OR 5

DIMENSIONS IN MILLIMETERS
ADDITIONAL CONFIGURATIONS ON REQUEST - SPECIFICATIONS SUBJECT TO CHANGE