


TK-503

160 Mils


HIGH CURRENT PROBE

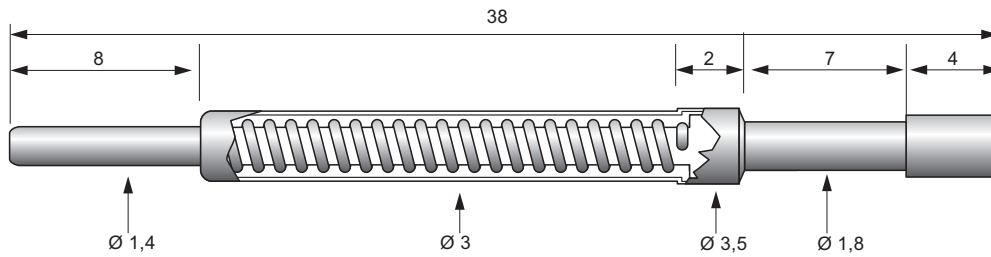


Tip Style	A	B	L	H16
Material	B	B-S	B-S	B
Ø mm	4,00	1,80	4,00	4,00

Receptacle

TKR-503

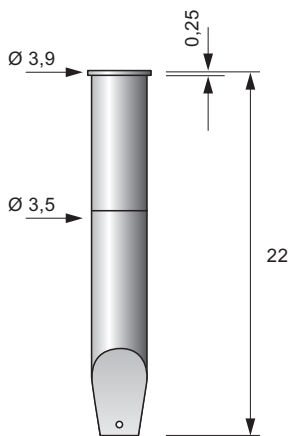

COLLARS HEIGHT TKC-503

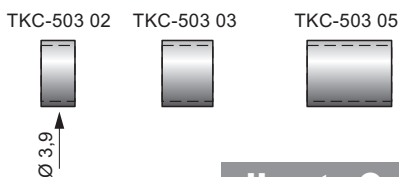

How to Order:

TKR-503

TKC-503

Technical Data

Recommended Minimum Centers : 4,00mm
 Current Rating : 10 A
 Typical Contact Resistance : 10 m Ω
 30 m Ω
 Recommended Working Travel : 5,6 mm

Materials

Barrel : Brass, gold plated
 Spring : Music Wire, steel / gold plated
 Plunger : Becu, hardened 24 Kt. gold plated

Max Travel : 7,0 mm. **Spring options :** 300-500 g.

Spring Force : 150 gr.

How to Order:

Serie	Material	Plunger	Ø	Spring Force	Galvanic
TK-503	B=Becu S=Steel SS=Stainless St.				G = gold N = nickel R = rodium
	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

DIMENSIONS IN MILLIMETERS
 ADDITIONAL CONFIGURATIONS ON REQUEST - SPECIFICATIONS SUBJECT TO CHANGE