


Tip Style	A	B	F	D	E	H	J	T	U
Material	B	B-S	B	B	B	B	B	B	B-S
Ø mm	0,75 1,52	0,75	0,75 1,52	1,02	1,52	1,52	0,75	1,52	0,75


Receptacle

TKR-75


WIRE WRAP

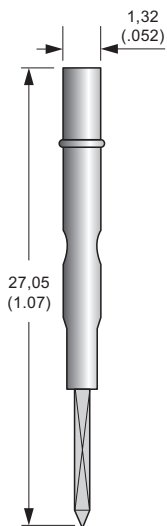

SOLDER CUP



CRIMP




How to Order:

TKR-75

W

- C = Crimp
- S = Solder cup
- W = Wire wrap
- WW = With Wire



FR4 suggested drill diameter

Technical Data

Recommended Minimum Centers : 1,91 mm (.075)
 Current Rating : 3,0 A
 Typical Contact Resistance : 50 m Ω
 Recommended Working Travel : 1,78 mm (.070)

Materials

Barrel : Brass, gold plated
 Spring : Music Wire, silver / gold plated
 Plunger : Becu, hardened 24 Kt. gold plated

Max Travel : 1,36 mm (.054)

Spring Force : 125 gr.

How to Order:

Serie	Material	Plunger	Ø	Spring Force	Galvanic
TK-75	B=Becu S=Steel SS=Stainless St.				G = gold N = nickel R = rodium