


TK-80

40 Mils

COMPACT PROBE

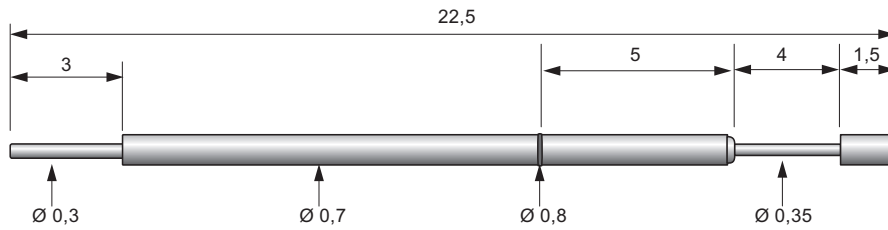


SMD
application


Tip Style	A	B	F	D	E	L	LR
Material	B	B-S	B	B	B	B-S	B
Ø mm	0,80	0,35	0,80	0,80	0,80	0,80	0,80

Receptacle

TKR-80

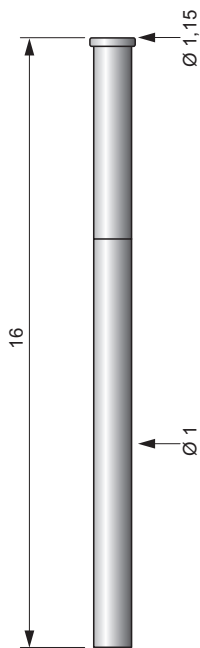

TKP111

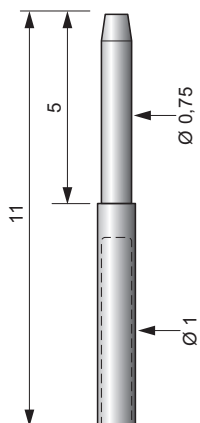

How to Order:

TKR-80

W

C = Crimp
S = Solder cup
W = Wire wrap
WW = With Wire

Technical Data

Recommended Minimum Centers : 1,00 mm
Current Rating : 1,0 - 1,5 A
Typical Contact Resistance : 20 m Ω
Recommended Working Travel : 3 mm

Materials

Barrel : Brass, gold plated
Spring : Music Wire, steel / gold plated
Plunger : Becu, hardened 24 Kt. gold plated
Receptacle : Brass, gold plated

Max Travel : 3,8 mm.

Spring Force : 100 gr.

How to Order:

Serie	Material	Plunger	Ø	Spring Force	Galvanic
	B=Becu S=Steel SS=Stainless St.				G = gold N = nickel R = rodium
TK-80	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

DIMENSIONS IN MILLIMETERS
ADDITIONAL CONFIGURATIONS ON REQUEST - SPECIFICATIONS SUBJECT TO CHANGE